

Synology Cube Station Series

CS407 CS407e



Installation Guide Guía de instalación

Synology LIMITED WARRANTY AND LIABILITY

Synology provides a limited warranty for its Products only to the initial person or entity that originally purchased the Products from Synology or its authorized distributor or retailer. Synology warrants that every hardware portion of the Products will be free from physical defects in material and workmanship for one year from the date of purchase, or the Product will be repaired or replaced as determined solely by Synology. If the Product proves defective during this warranty period, you can contact the local dealer in order to obtain assistance. You must provide proof of purchase and a bar code number from the Product's packaging when asking for assistance. Synology Products are barebones devices so Synology makes no warranty of the hard disk installed, or warranty on compatibility of all hard disks.

SYNOLOGY SHALL HAVE NO LIABILITY TO YOU UNDER THIS LIMITED WARRANTY IF THE PRODUCT IS INSTALLED AND USED IN A MANNER NOT SPECIFIED OR DESCRIBED IN THE PRODUCT SPECIFICATIONS OR DESCRIPTION, THE PRODUCT HAS BEEN MODIFIED OR ALTERED IN ANY WAY BY ANY PARTY OTHER THAN SYNOLOGY, OR THE FAILURE OF THE PRODUCT TO CONFORM TO ITS SPECIFICATIONS CAN BE ATTRIBUTED TO CAUSES THAT NOT THE RESPONSIBILITY OF SYNOLOGY.

SYNOLOGY MAKES NO WARRANTY OR REPRESENTATION, EXPRESSED, IMPLIED, OR STATUTORY, WITH RESPECT TO ITS PRODUCTS OR THE CONTENTS OR USE OF THIS DOCUMENTATION AND ALL ACCOMPANYING SOFTWARE, AND PARTICULARLY DISCLAIMS ITS QUALITY OR PERFORMANCE FOR ANY PARTICULAR PURPOSE.

SYNOLOGY MAKES NO GUARANTEE THAT ALL DATA STORED ON SYNOLOGY PRODUCTS IS ALWAYS SECURE WITHOUT ANY RISKS OF DATA LOSS. SYNOLOGY REMINDS YOU TO BACK UP THE DATA PERIODICALLY. UNDER NO CIRCUMSTANCES SHALL SYNOLOGY BE LIABLE IN ANY WAY TO THE USER FOR DAMAGES, INCLUDING ANY SAVINGS, LOST PROFITS OR OTHER INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OF, OR INABILITY TO USE SYNOLOGY PRODUCTS OR RESULTING LOSS OF DATA FROM SUCH USE.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE (OR JURISDICTION TO JURISDICTION). SYNOLOGY'S RESPONSIBILITY FOR MALFUNCTIONS AND DEFECTS IN HARDWARE IS LIMITED TO REPAIR OR REPLACEMENT AS SET FOR IN THIS WARRANTY STATEMENT. FOR CUSTOMERS, EXCEPT FOR THE EXPRESS WARRANTIES CONTAINED IN THIS WARRANTY STATEMENT, SYNOLOGY DISCLAIMS ALL OTHER WARRANTIES AND CONDITIONS, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE, FOR THE PRODUCT, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES AND CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. NO OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, WILL APPLY AFTER THE LIMITED WARRANTY PERIOD HAS EXPIRED. SOME STATES OR JURISDICTIONS DO NOT ALLOW THE EXCLUSION OF CERTAIN IMPLIED WARRANTIES OR CONDITIONS, OR LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY OR CONDITION LASTS, SO THIS LIMITATION MAY NOT APPLY TO YOU. THIS LIMITED WARRANTY COVERAGE TERMINATES IF YOU SELL OR OTHERWISE TRANSFER THIS PRODUCT TO ANOTHER PARTY.

SYNOLOGY DOES NOT ACCEPT LIABILITY BEYOND THE REMEDIES PROVIDED FOR IN THIS LIMITED WARRANTY OR FOR SPECIAL, INDIRECT, CONSEQUENTIAL OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, ANY LIABILITY FOR THIRD-PARTY CLAIMS AGAINST YOU FOR DAMAGES, FOR PRODUCTS NOT BEING AVAILABLE FOR USE, OR FOR LOST DATA OR LOST SOFTWARE. SYNOLOGY'S LIABILITY SHALL NOT EXCEED THE AMOUNT YOU PAID FOR THE PRODUCT THAT IS THE SUBJECT OF A CLAIM. THIS IS THE MAXIMUM AMOUNT FOR WHICH SYNOLOGY IS RESPONSIBLE.

SYNOLOGY INC. PRODUCTS ARE NOT INTENDED FOR USE IN MEDICAL, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS.

OBTAINING WARRANTY SERVICE

If the product is not functioning properly after making use of resources provided by Synology Inc., access the online web site: www.synology.com/support

Copyright Notice

Copyright © 2004-2007 Synology Inc.; All rights reserved.

Synology and other names of Synology products are trademarks or registered trademark of Synology Inc. Other products and company names mentioned herein are trademarks of their respective holders.

P.4 -----






English

P.17 -----

Español

SAFETY WARNING

Please read this safety warnings and instructions carefully before use, and keep it well for your future reference.

		
Keep away from direct sunlight or near chemicals. Make sure the environment does not experience abrupt changes in temperature or humidity.	Do keep Synology product stand erect. Do not lay it down horizontally.	Do not put Synology product close to any liquid.
	CAUTION! 	
Do not put Synology product on a cart, table, or desk, which is not stable to avoid it's falling off.	The power cord must plug in to the right supply voltage. Make sure that the supplied AC voltage is correct and stable.	Before cleaning, unplug the power cord first. Wipe Synology product with wet paper towels. Do not use chemical or aerosol cleaners to clean it.

PACKAGE CONTENTS

Before you begin, please check the package contents to verify that you have received the items below.

		
CS407/CS407e X 1	Installation CD	AC power adapter
		
2M RJ-45 LAN cable	AC power cord	Installation Guide
Assembling Kit		
		
Screws for fixing hard drive and case X 16	SATA cable X 4	HDD cable X 4
		
Cable tie X 2	Cable lock X 1	

Note:

It is recommended that you install hard disks with the same size to make the best use of hard disk capacity.

INSTALL HARD DRIVE

CS407/CS407e requires 3.5" SATA hard drives for installation. Refer to the following steps for details:




Warning! If you use a hard disk with data on it to install, system will format the hard disk and erase all data in some cases. Please back up the data if you need it in the future.


- 1 Remove the four screws fixed on the back cover.



- 2 Put the back cover down carefully.

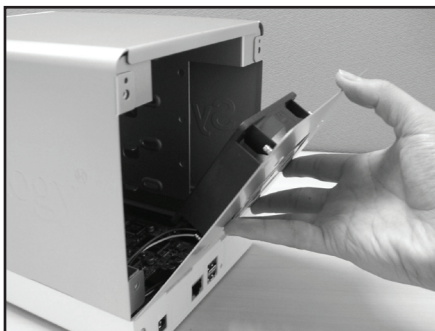


- 3 Lift the upper case and then pull it out.

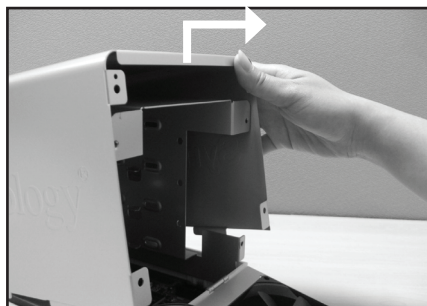


INSTALL HARD DRIVE


- 4 The 4 black connectors on the mother board are for SATA cables, and the 4 white connectors are for hard disk power cables. You can see the disk identity numbers printed beside the connectors.

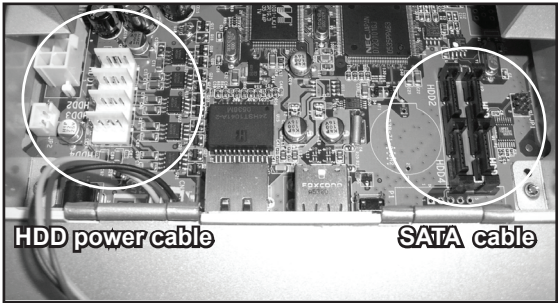

- 5 Connect the 4 hard disk power cables.

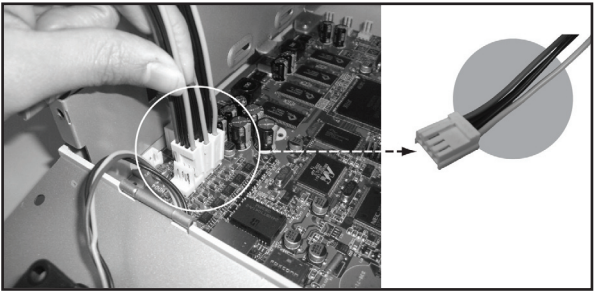


- 6 Connect the 4 SATA cables. The longest one should be connected to the HDD 1 connector.

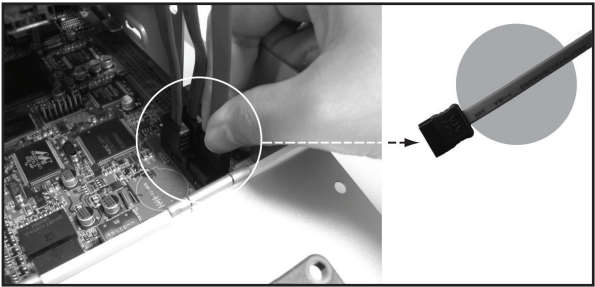

INSTALL HARD DRIVE

English


- 7 Place the hard disks into the hard disk tray with connectors faced outside. The top hard disk is HDD 1, and then HDD 2, HDD 3, and HDD 4.

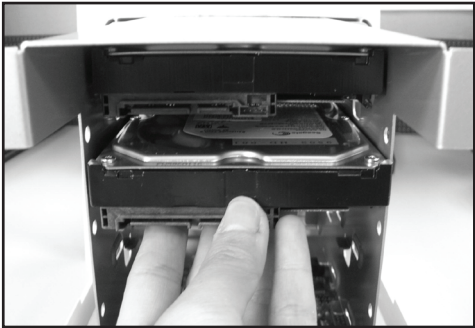

- 8 Fix the hard disks with the 5mm screws provided. Use 2 screws on each side of the hard disk.




- 9 Connect the SATA cables and the hard disk power cables to the hard disks. Please note that the longest SATA cable is for HDD 1.

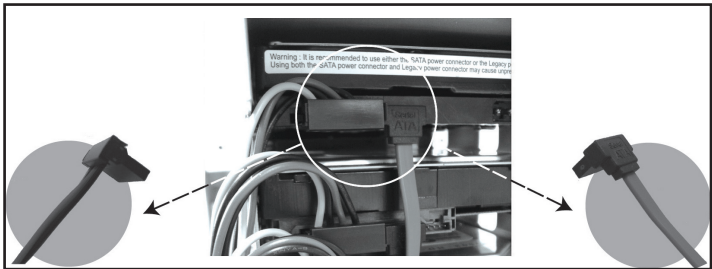


INSTALL HARD DRIVE


- 10 Use the cable ties to arrange the hard disk power cables and SATA cables.

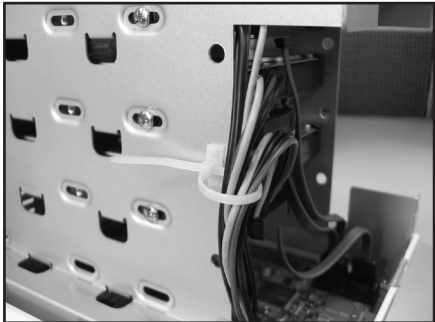

- 11 Place the upper case back to the position.

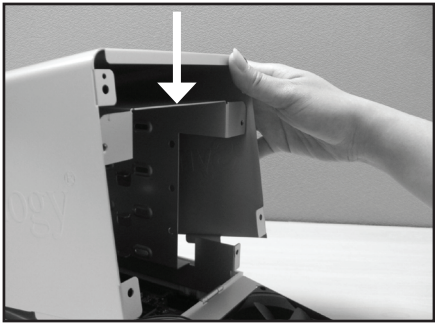


- 12 Fix the cable lock to its hole on the back cover. Make sure on the inner side of the back cover, the cable lock is hooked.

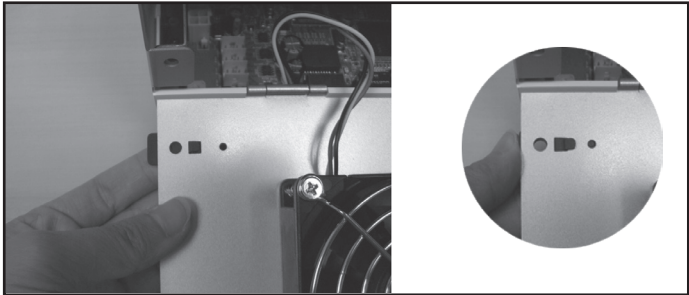

INSTALL HARD DRIVE


English

- 13 Close the back cover and fix it with the four screws.

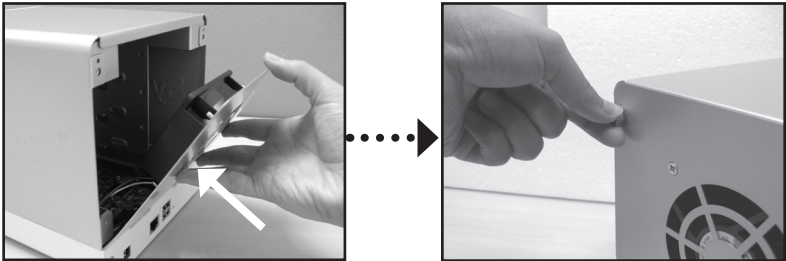


TURN ON SERVER


- 1 Connect the AC adapter to the power port, and fix the cable to the cable lock. Then plug the power cord into a power socket.

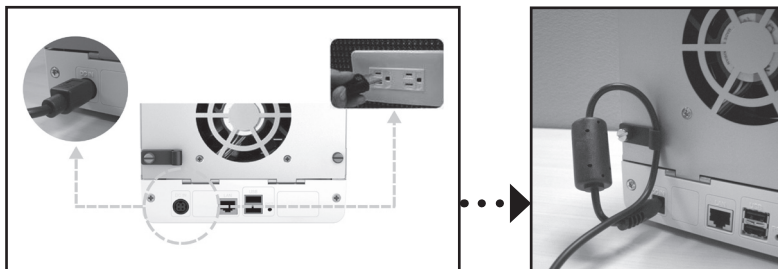

- 2 Connect the RJ-45 cable to the server and connect the other end to your switch/hub/router or notebook/desktop PC.

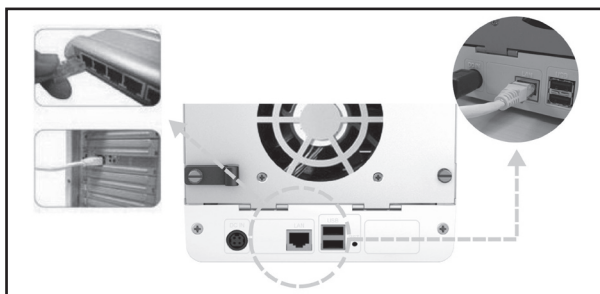

- 3 Press the Power button on the front panel to turn on the server.

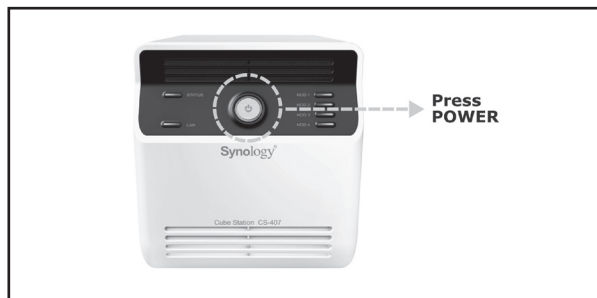


INSTALL SYSTEM SOFTWARE

Windows User

- 1 Insert the installation CD to your computer.



- 2 Choose Set up the Synology Server on the autorun menu.

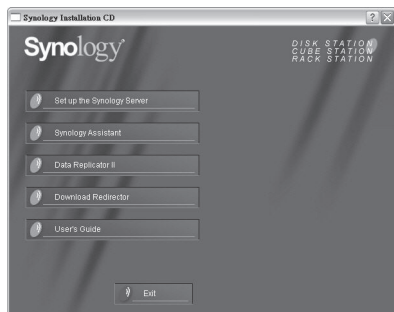

- 3 Click Browse to select the ".pat" installation file in the installation CD.
- 4 Follow the on-screen instructions to complete the setup process.

Note: If you choose One-Click Setup, the admin password will be blank.

Mac User

- 1 Insert the installation CD to your computer.




- 2 Double click on the CD-Rom Drive thumbnail.




INSTALL SYSTEM SOFTWARE

- 3 Double click MacOSX.

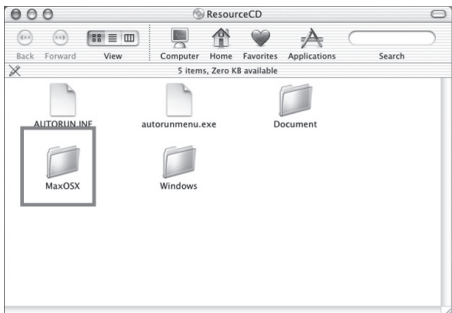


- 4 Double click Synology Assistant-SYNOLOGY.dmg.

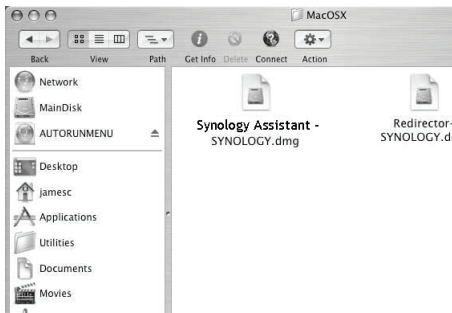

- 5 Double click on the automatically generated thumbnail Synology Assistant-SYNOLOGY.dmg on the desktop.



- 6 Double click Synology Assistant to run the Setup Wizard.

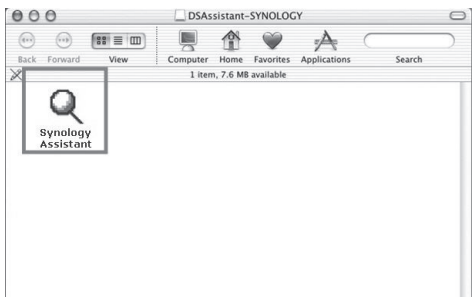

INSTALL SYSTEM SOFTWARE

- 7 Click Browse to select the “.pat” installation file in the installation CD.
- 8 Follow the on-screen instructions to complete the setup process.





Note: If you choose One-Click Setup, the admin password will be blank.

CONGRATULATIONS!

Server has been set up. Refer to the User's Guide in the installation CD for advanced settings and management. For more information or online resources, please visit <http://www.synology.com>.

ADVERTENCIA DE SEGURIDAD

Lea atentamente estas advertencias de seguridad y las instrucciones antes de su uso y consérvelas para su referencia futura.

		
Manténgalo alejado de la luz solar directa y de productos químicos. Asegúrese de que no haya cambios bruscos de temperatura en su entorno.	Mantenga el producto Synology en posición vertical. No lo coloque en horizontal.	No coloque el producto Synology cerca de líquidos.
		
No coloque el producto Synology en un carro, mesa o escritorio que no sea estable, para evitar que se pueda caer.	El cable de alimentación debe enchufarse en una fuente de tensión adecuada. Asegúrese de que la tensión de CA suministrada es la correcta, así como que sea estable.	Antes de limpiar el equipo, desconecte el cable de alimentación. Limpie el producto Synology con toallitas de papel humedecidas. No utilice productos químicos ni aerosoles para limpiarlo.

CONTENIDO DEL EMBALAJE

Antes de comenzar, compruebe el siguiente contenido del paquete para asegurarse de que ha recibido los elementos que se indican a continuación.

		
CS407/CS407e X 1	CD de instalación	Adaptador de alimentación
		
Cable RJ-45 LAN de 2 m	Cable de alimentación	Guía de instalación rápida
Kit de montaje		
		
tornillo de disco duro de 5 mm x 16	Cable SATA x 4	Cable de alimentación de disco duro x 4
		
sujetacables x 2	Sujetacables x 1	

Observación:

It is recommended that you install hard disks with the same size to make the best use of hard disk capacity.

INSTALACIÓN DEL DISCO DURO

La unidad CS407/CS407e precisa discos duros SATA de 3,5" para su instalación (visite <http://www.synology.com> para ver los discos duros que se recomiendan). Siga estos pasos para completar la instalación.




Advertencia: Si utiliza un disco duro con datos para realizar la instalación, el sistema lo formateará y borrará todos sus datos en algunos casos. Realice una copia de seguridad de los datos si los va a necesitar en el futuro.

Español


- 1 Retire los cuatro tornillos de la cubierta trasera.



- 2 Abra la cubierta con cuidado.

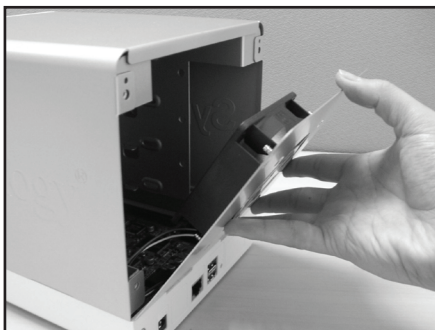


- 3 Levante la carcasa superior y tire de ella hacia fuera.

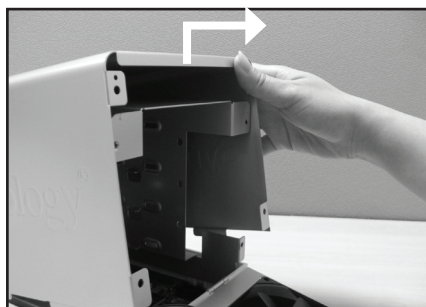


INSTALACIÓN DEL DISCO DURO

Español


- 4 Los 4 conectores negros de la placa principal son para los cables SATA y los 4 conectores blancos son para los cables de alimentación del disco duro. Puede ver los números de identidad del disco impresos junto a los conectores.

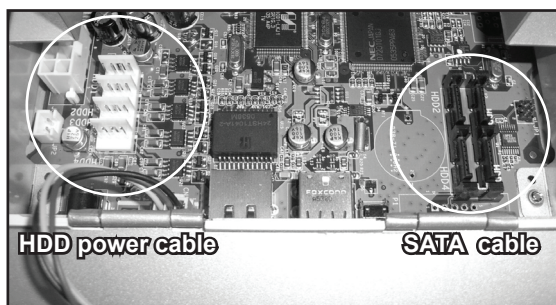

- 5 Conecte los 4 cables de alimentación del disco duro.

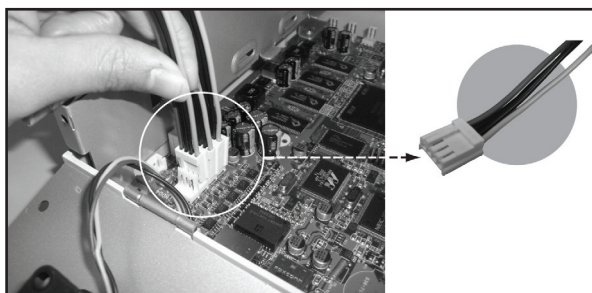


- 6 Conecte los 4 cables SATA. El más largo debe conectarse al conector del HDD 1.

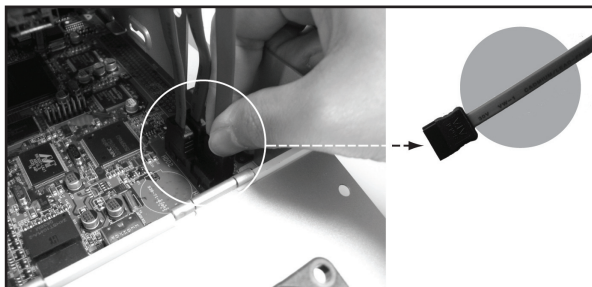

INSTALACIÓN DEL DISCO DURO


- 7 Coloque los discos duros en la bandeja de disco duro con los conectores mirando hacia fuera. El disco duro superior es HDD 1; después vienen HDD 2, HDD 3 y HDD 4.

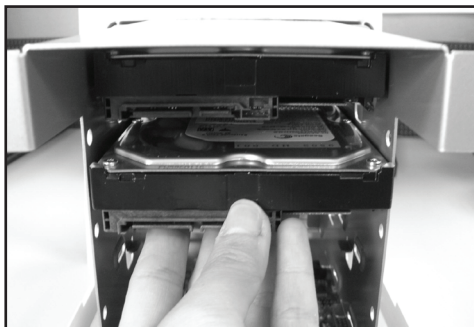

- 8 Fije los discos duros con los tornillos de 5 mm que se incluyen. Utilice 2 tornillos a cada lado del disco duro.




- 9 Conecte los cables SATA y los cables de alimentación del disco duro a los discos duros. Tenga en cuenta que el cable SATA más largo es para HDD 1.

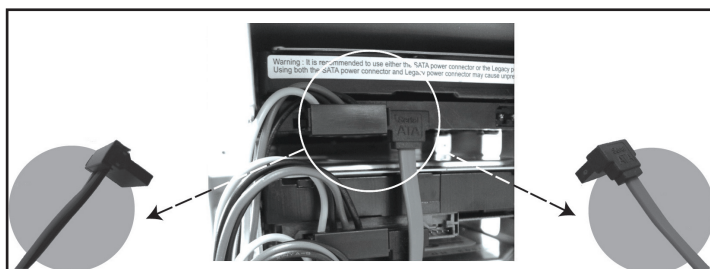


INSTALACIÓN DEL DISCO DURO

Español


- 10 Utilice los sujetacables para organizar los cables de alimentación del disco duro y los cables SATA.

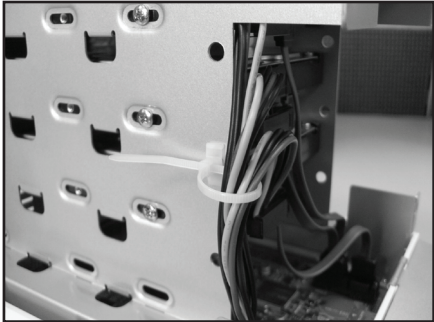

- 11 Vuelva a colocar la carcasa superior en su posición.

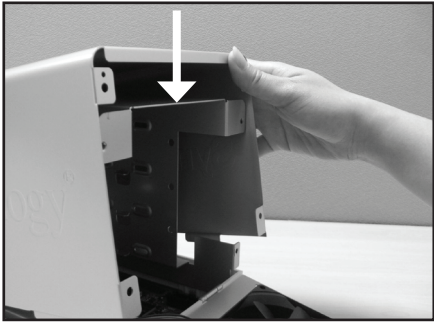


- 12 Fije el sujetacables a su orificio en la cubierta trasera. Asegúrese de que el sujetacables queda enganchado a la parte interior de la cubierta trasera.

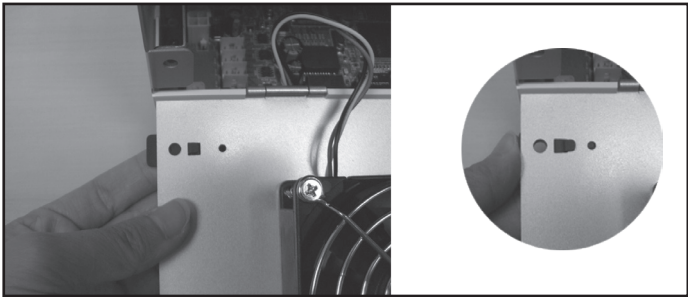

INSTALACIÓN DEL DISCO DURO

13 Cierre la carcasa posterior y fjela con los cuatro tornillos.

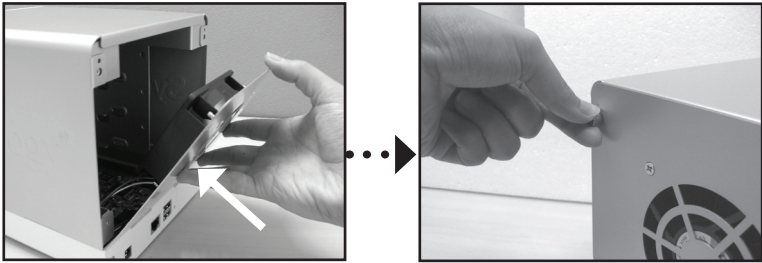


Español


ENCIENDA EL SERVIDOR

Español

- 1 Conecte el adaptador de CA al puerto de alimentación y fije el cable al sujetacables. A continuación, conecte el cable de alimentación a un tomacorrientes.

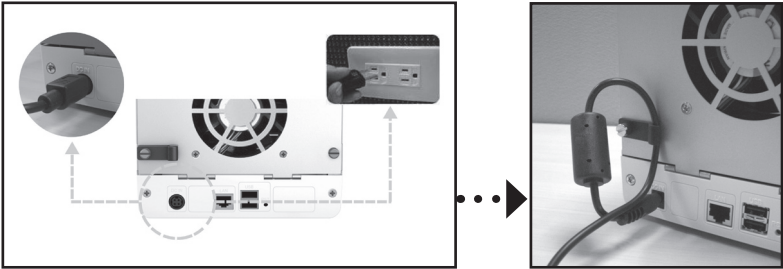

- 2 Utilice el cable LAN para conectar el servidor a su conmutador/enrutador/ concentrador.

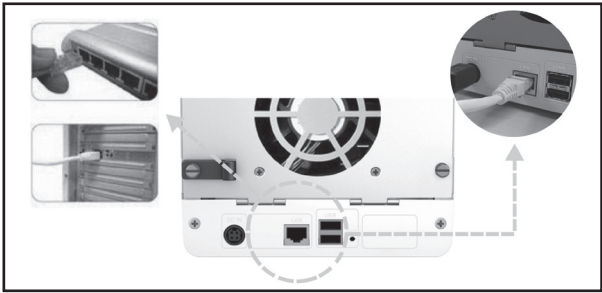

- 3 Pulse el botón de encendido del panel frontal para encender el servidor. Espere a que el LED POWER esté azul de manera constante.




INSTALACIÓN DEL SOFTWARE DEL SISTEMA

Usuarios de Windows

- 1 Inserte el CD de instalación en el equipo.



- 2 En el menú de ejecución automática, elija "Instalar el servidor Synology".

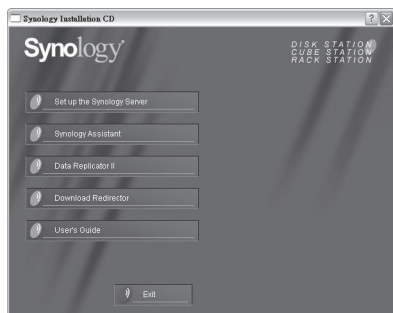

- 3 Haga clic en Examinar para especificar el archivo de instalación ".pat" en el CD de instalación.
- 4 Siga las instrucciones que aparecen en pantalla para realizar el proceso de instalación.

Observación: Si elige Configuración con un clic, la contraseña del administrador estará vacía.

Usuarios de Mac

- 1 Inserte el CD de instalación en el equipo.




- 2 Haga doble clic en la miniatura de la unidad de CD-Rom.




INSTALACIÓN DEL SOFTWARE DEL SISTEMA

Español

- 3 Haga doble clic en la miniatura “MacOSX”.

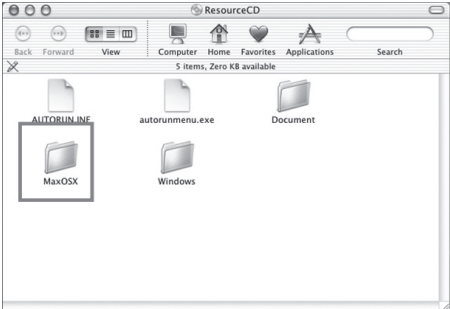

- 4 Haga doble clic en la miniatura "Synology Assistant-SYNOLOGY.dmg".

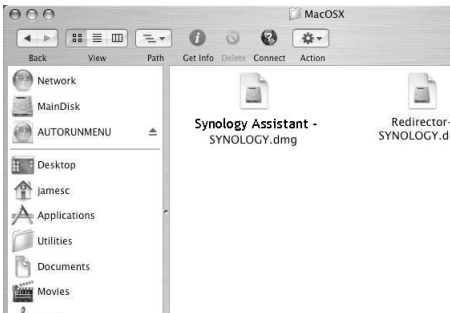

- 5 Haga doble clic en la miniatura “Synology Assistant-SYNOLOGY” generada automáticamente en el escritorio.



- 6 Haga doble clic en la miniatura “Synology Assistant” para ejecutar el asistente de instalación.



INSTALACIÓN DEL SOFTWARE DEL SISTEMA

- 7 Haga clic en Examinar para especificar el archivo de instalación “.pat” en el CD de instalación.
- 8 Siga las instrucciones que aparecen en pantalla para realizar el proceso de instalación.

Observación: Si elige Configuración con un clic, la contraseña del administrador estará vacía.

Español

ENHORABUENA

Servidor se ha instalado. Consulte el manual del usuario en el CD de instalación para ver las opciones avanzadas de configuración y administración. Si desea obtener más información o recursos en línea, visite <http://www.synology.com>.

GPL Notice

This Synology product uses software partially or completely licensed under the terms of the GNU GENERAL PUBLIC LICENSE. The author of the software does not provide any warranty. This does not affect the warranty for the product itself.

To get source codes please contact:

Synology Inc.

6F -2, No.106,

Chang An W. Rd.,

Taipei 103,

Taiwan

Or visit <http://www.synology.com>

A fee will be charged for production and shipment for each copy of the source code.

Below is the full context of GNU GENERAL PUBLIC LICENSE:

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software—to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

GPL Notice

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form)

GPL Notice

with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING

GPL Notice

BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

